
















True WDR

Summary

MEGApix® IP cameras deliver crystal-clear 2.1MP/1080p resolution images at real-time 30fps. Features include Smart IR™, true WDR and Smart DNR™ 3D digital noise reduction for quality video in challenging lighting environments. PoE simplifies installation.

Features

- 2.1MP/1080p 1/2.7" image sensor at real-time 30fps
- DWC-MB721M4TIR: 4.0mm fixed lens
- DWC-MB721M8TIR: 8.0mm fixed lens
- True Wide Dynamic Range (WDR)
- Dual codecs (H.264, MJPEG) with simultaneous streaming
- 60' Smart IR™ with intelligent camera sync
- Smart DNR™ 3D digital noise reduction
- True day/night mechanical IR cut filter
- Programmable privacy zones
- Auto gain control (AGC)
- Auto white balance (AWB)
- Motion detection
- Micro SD/SDHC/SDXC class 10 card slot (card not included)
- Web server built-in
- PoE class 2 and DC12V
- UL listed
- ONVIF conformant, profile S
- IP66 environmental-rated dust-tight and water-resistant
- 5 year warranty

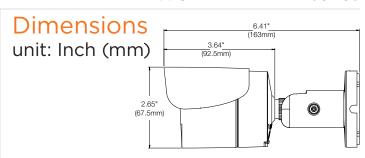

Specifications



IMAGE	
Image sensor	2.1MP/1080p 1/2.7" CMOS
Total pixels	1928 (H) x 1088 (V)
	0.41 lux (color)
Minimum scene illumination	0.0 lux (B/W)
LENS	
Focal length	DWC-MB721M4TIR: 4.0mm, F2.0 DWC-MB721M8TIR: 8.0mm, F2.0
Lens type	Fixed lens
Field of view (FoV)	DWC-MB721M4TIR: 88°
	DWC-MB721M8TIR: 42°
IR distance	60ft range
OPERATIONAL	
Shutter mode	Auto, manual, anti-flicker, slow shutter
Shutter speed	1/30 ~ 1/8000
Slow shutter	1~1/5,1/7.5, 1/15
Auto gain control	Auto
Day / night	Auto, day (color), night (B/W)
Smart DNR™ 3D	-
	O ~ 11
digital noise reduction	Two MDD an off
Wide dynamic range (WDR)	True WDR on, off
Wide dynamic range (WDR) dB	120dB
Privacy zone	16 programmable privacy masks
Backlight Compensation (BLC)	On / off / HSBLC
Mirror and flip	Yes
	Notifications via e-mail, FTP server
Alarm notifications	or SD card recording
	Ÿ
Memory slot	Micro SD / SDHC / SDXC up to 128GB
	(card not Included)
NETWORK	
LAN	802.3 compliance 10/100 LAN
Video compression type	H.264, MJPEG
Resolution	H.264: 1080p/720p/VGA/D1/CIF MJPEG: 1280 x 720/800 x 600/VGA/768 x 432/D1/CII
Frame rate	Up to 30fps at all resolutions
	100Kbps ~ 10Mbps, multi-rate for preview
Video bitrate	and recording
Bitrate control	Multi-streaming CBR/VBR at H.264 (controllable frame rate and bandwidth)
Streaming capability	Dual-stream at different rates and resolutions
IP	IPv4
Protocol	ONVIF, TCP/IP, UDP, autoIP, RTP(UDP/TCP), RTSP, NTP, HTTP,HTTPS, SSL, DNS, DDNS, DHCP, FTP, SMTP, ICMP, SNMPv1/v2c/v3(MIB-2)
Security	HTTPS (TLS), IP filtering, 802.1x, digest authentication (ID/PW)
ONVIF conformance	Yes
z	OS: Windows*, Mac* OS, Linux*
Web viewer	Browser: Internet Explorer*, Google Chrome*,
AACD AIGMGI	
Video management setting	Mozilla Firefox®, Safari®
Video management software	DW Spectrum* IPVMS
ENVIRONMENTAL	
Operating temperature	14°F ~ 122°F (-10°C ~ 50°C)
Operating humidity	Less than 90% (non-condensing)
IP rating	IP66 certified
Other certifications	CE, FCC, RoHS, UL listed
	52, 1 55, 115115, 52 listed
ELECTRICAL	
	DC 12V, PoE (IEEE 802.3af Class 3).
Power requirement	(adaptor not included)
Power requirement Power consumption	(adaptor not included) DC12V: max 5.6W PoE: max 7.3W
	DC12V: max 5.6W
Power consumption MECHANICAL	DC12V: max 5.6W PoE: max 7.3W
Power consumption MECHANICAL Material	DC12V: max 5.6W PoE: max 7.3W
Power consumption MECHANICAL	DC12V: max 5.6W PoE: max 7.3W









