




UNIVERSAL
HD COAX
UTC

VARI-FOCAL LENS
WITH
MOTORIZED ZOOM
&
AUTO FOCUS

5MP **30fps** **5 YEAR**
Up to 20fps Universal HD / Analog at 4MP Resolution 2.8–12mm Vari-Focal Lens IP66 Rated Warranty with Auto Focus

Dimensions

unit: Inch (mm)

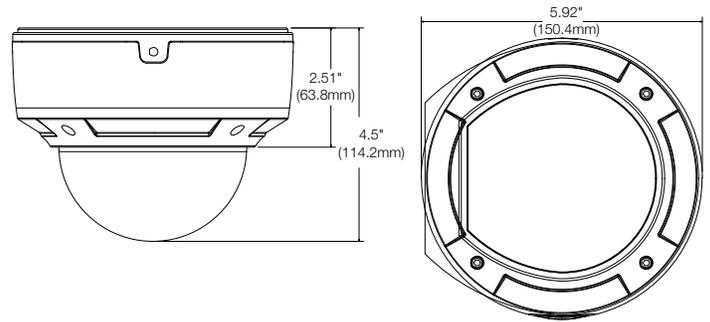

Summary

5MP Universal HD over Coax® cameras deliver crystal-clear images and support HD-Analog, HD-TVI and HD-CVI signals, and all legacy analog signals. The IK10 impact resistant vandal dome cameras are IP66 rated and can be controlled via the same coax cable using UTC. All DW® Universal HD over Coax® cameras are engineered to work with our VMAX® A1 Plus™ HD over Coax™ DVRs using your existing coax infrastructure for a cost effective, high resolution surveillance solution.

Features

- Universal HD over Coax® technology with HD-Analog, HD-TVI, HD-CVI and all legacy analog signal support
- 5MP 1/2.7" image sensor at 20fps / 4MP at real-time 30fps
- 2.8-12mm vari-focal lens with motorized zoom and auto focus
- Digital Wide Dynamic Range (D-WDR)
- OSD control via Coaxial (UTC)
- 100' range IR
- 3D digital noise reduction
- True day/night with mechanical IR cut filter
- Auto gain control (AGC)
- Backlight compensation (BLC)
- Auto white balance (AWB)
- IP66 certified weather and tamper resistant
- IK-10 impact rated
- 5 year warranty

Accessories (Optional)



DWC-MVTWMJ2
Wall mount and
junction box



DWC-MVTCMJ2
Ceiling mount and
junction box



DWC-MVTJUNC2
Junction box

Specifications

IMAGE	
Image sensor	5MP 1/2.7" CMOS sensor
Active pixels	2592(H) x 1944(V)
Scanning system	CMOS line-by-line
Frequency	60Hz/50Hz
Signal technology	Universal HD over Coax® technology with HD-Analog, HD-TVI, HD-CVI and all legacy analog signal support
Resolution	5MP: 2560 x 1936 @ 20fps 4MP: 2560 x 1440 @ 30fps
Minimum scene illumination	0.01 lux (color) 0 lux (B&W)
Video output	HD-Analog, HD-TVI and HD-CVI 5MP at 20fps, 4MP at 30fps Analog up to 960H at 30fps
LENS	
Focal length	2.8-12mm, F1.2
Lens type	vari-focal lens with motorized zoom and auto focus
Field of view (FoV)	91.2°-33.4°
IR distance	100ft range
OPERATIONAL	
Shutter mode	Auto, manual
Shutter speed	1 / 60s - 1 / 100000s
Backlight (BLC)	Yes
Wide Dynamic Range (WDR)	D-WDR
3D digital noise reduction	Digital noise reduction
White balance	Yes
Day / night	True day/night
Mirror / flip	Yes
Auto gain control	Auto
Sharpness	Yes
Up the Coax (UTC) camera control	UTC camera control
ENVIRONMENTAL	
Operating temperature	-22°F - 122°F (-30°C - 50°C)
Operating humidity	10 % - 90 % humidity
IP rating	IP66 certified weather and tamper resistant
IK rating	IK10 rated impact resistant
Other certifications	CE, FCC, RoHS
ELECTRICAL	
Power requirements	DC12V
Power consumption	IR ON : < 4W IR OFF : < 1W
MECHANICAL	
Material	Metal vandal housing, polycarbonate dome
Dimensions	4.5" x 5.92" (114.2 x 150.4 mm)
Weight	2.27 lb (1.030kg)
Warranty	5 year warranty