

## RadioRA 3 Sunnata Keypads


RadioRA 3 Sunnata keypads provide homeowners with a simple and elegant way to operate lights, shades/draperies, motorized screens, and many other devices.

Sunnata keypads feature large, easy-to-use buttons. LED bars on each button aid in locating the buttons in low light conditions. Printing colors are selected to provide increased readability, regardless of the keypad finish or color.


Default printing provides the ability to use the keypad in the space, and once the custom printing needed has been identified, a replacement button kit can be redeemed using the RadioRA 3 setup software.

Replacement button kits are available in a variety of colors and finishes with custom printing to clearly identify each button's function. The flexible design of the keypads allow the color, number of buttons, and the configuration of the buttons to be changed in the field, after installation.


Use with Lutron Designer (Claro) wallplates. Wallplates are sold separately. Lutron Claro wallplates snap on with no visible means of attachment.

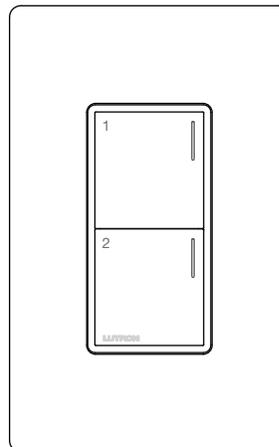

RRST-W2B

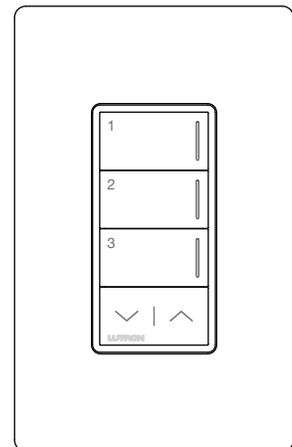

RRST-W3RL

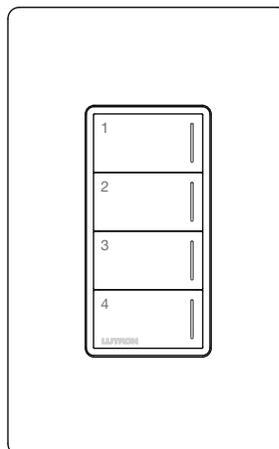

RRST-W4B

### Model Numbers

RRST-W2B-XX*	2-Button Keypad (default printing)
RRST-W3RL-XX*	3-Button Keypad with Raise / Lower (default printing)
RRST-W4B-XX*	4-Button Keypad (default printing)
STBK-W**	Replacement Button Kit

\* "XX" in the model number represents color/finish code. See **Colors and Finishes** at end of document.

\*\* See page 5 for specification information.

## RadioRA 3 Sunnata Keypads

### Specifications

<b>Model Numbers</b>	Keypads: RRST-W2B, RRST-W3RL-XX , RRST-W4B Replacement Button Kits: STBK-W
<b>Power</b>	120–277 V~ 50/60 Hz 0.25 A
<b>Typical Power Consumption</b>	0.25 W, 1.5 W Max Test conditions: All LEDs on, constant transmission
<b>Regulatory Approvals</b>	cULus, NOM, FCC, IC, IFT
<b>Environment</b>	Ambient operating temperature: 32 °F to 104 °F (0 °C to 40 °C), 0% to 90% humidity, non-condensing. Indoor use only.
<b>Communications</b>	For reliable performance in a system, this device should be placed within 25 ft (7.6 m) of two additional compatible wireless devices, such as RadioRA 3 Sunnata products and the RadioRA 3 processor.
<b>ESD Protection</b>	Tested to withstand electrostatic discharge without damage or memory loss, in accordance with IEC 61000-4-2.
<b>Surge Protection</b>	Tested to withstand surge voltages without damage or loss of operation, in accordance with IEEE C62.41-1991 “Recommended Practice on Surge Voltages in Low-Voltage AC Power Circuits”.
<b>Power Failure</b>	Power failure memory: Should power be interrupted, the keypad will return to its previous state when power is restored.
<b>Mounting</b>	Requires a U.S. wallbox. 3 ½ in (89 mm) deep recommended, 2 ¼ in (57 mm) deep minimum.
<b>Wiring</b>	RadioRA 3 Sunnata keypads require a 120–277 V~ hot and neutral wire connection.
<b>Warranty</b>	1-Year Limited Warranty <a href="http://www.lutron.com/TechnicalDocumentLibrary/warranty.pdf">www.lutron.com/TechnicalDocumentLibrary/warranty.pdf</a>


### Design Features

- At the press of a single button, lights fade ON or OFF to desired levels and shades/draperies open or close to desired positions.
- Light levels and shade/drapery positions can be fine-tuned by pressing and holding the raise/lower buttons.
- Programmable to select scene or room preset levels or positions.
- Adjustable status LED intensity through system level programming.
- Configurable raise/lower selection using programming software.
  - Last button pressed (default) - devices controlled by the last button pressed will raise/lower.
  - Double-tap - devices controlled by a double-tapped button will raise/lower.
  - Programmed devices - only the devices programmed to the button will raise/lower.
- Keypads include one credit redeemable for a single custom printed replacement button kit through the RadioRA 3 setup software.


## RadioRA 3 Sunnata Keypads

### Dimensions

All dimensions are shown as in (mm)

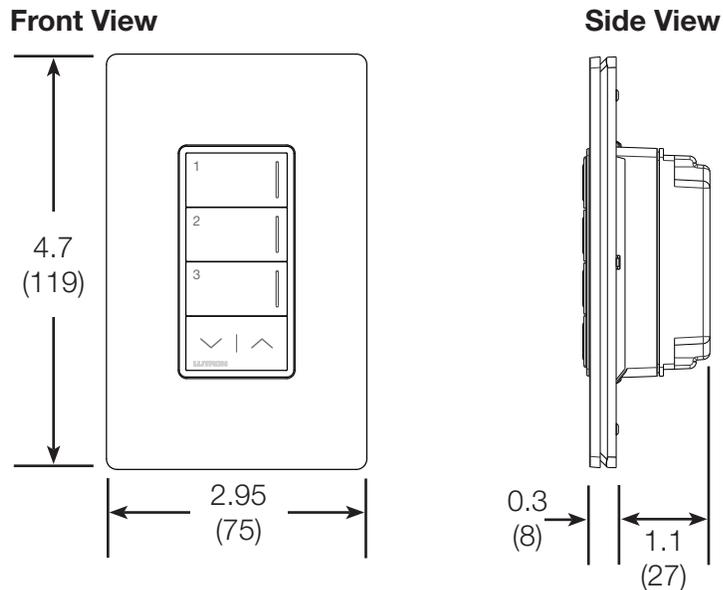


### Mounting and Parts Identification

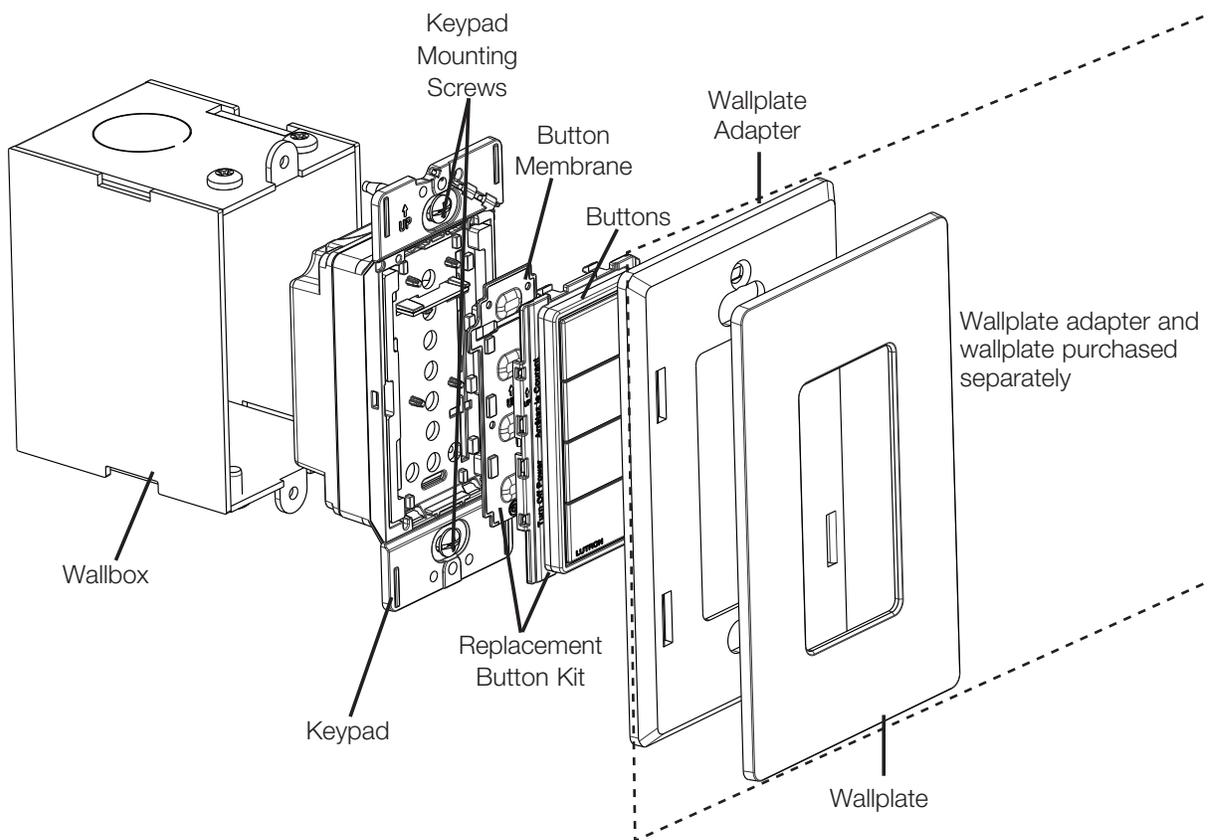


## RadioRA 3 Sunnata Keypads

### Operation

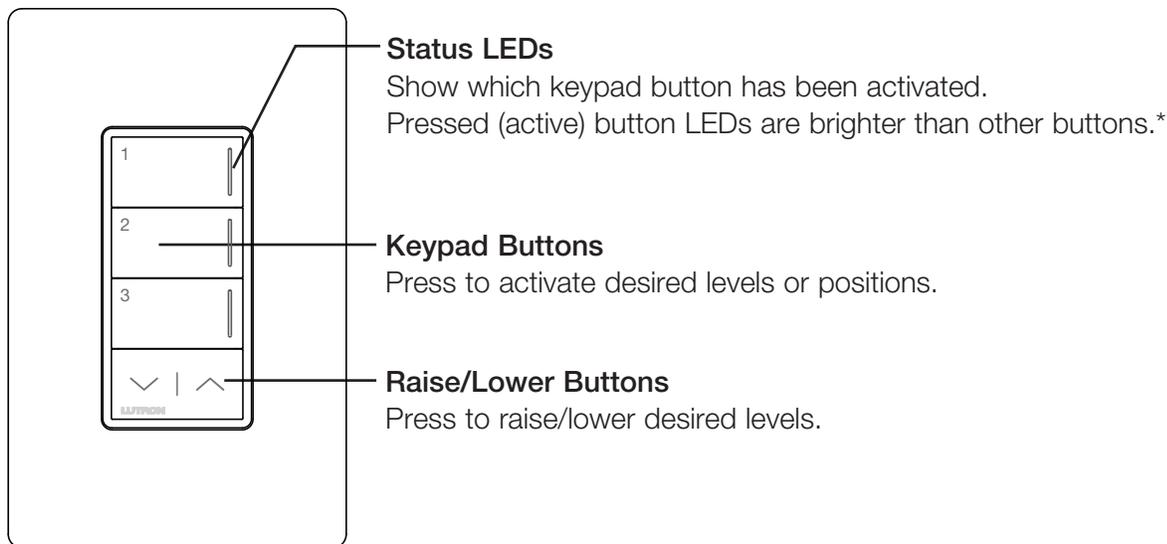

\* This behavior is programmable in the system software.


### Wiring Diagram

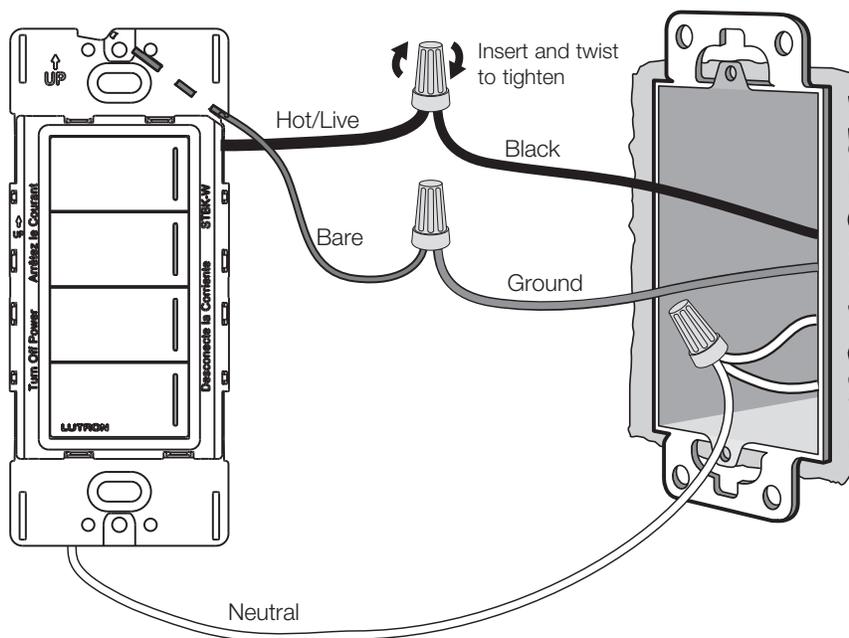

## RadioRA 3 Sunnata Keypads


### Replacement Button Kit Selection Guide

Component

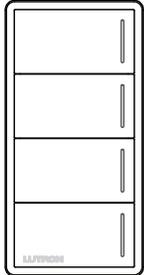


Button Kit only


Button Configuration

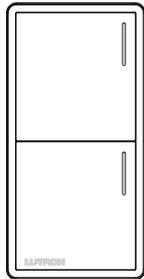

2-Button

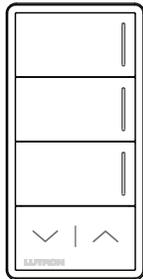

3-Button with  
Raise/Lower

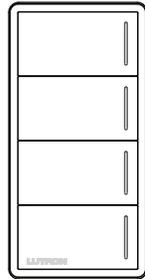

4-Button


Final Keypad/Replacement Button Kit configuration and selection to be completed in myProjects. Printing to be specified in myProjects. Visit [engraving.lutron.com/sunnata](http://engraving.lutron.com/sunnata) for engraving options.

## RadioRA 3 Sunnata Keypads


### Button Text/Icons

#### Lutron Defined (default) (Keypad only)


Default printing icons shown below. These keypad models include a redeemable printing credit for ordering a custom-printed button kit at a later time through the RadioRA 3 setup software.

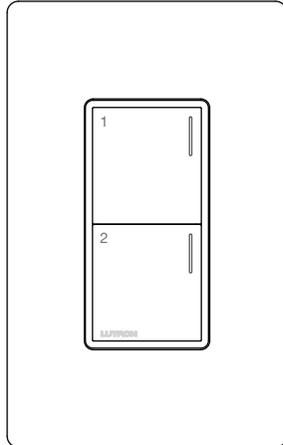

RRST-W2B

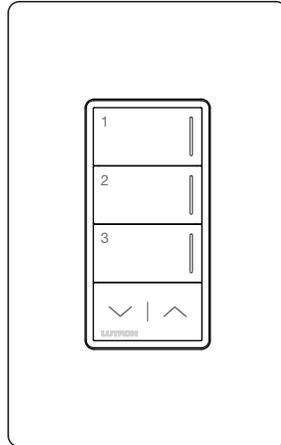

RRST-W3RL

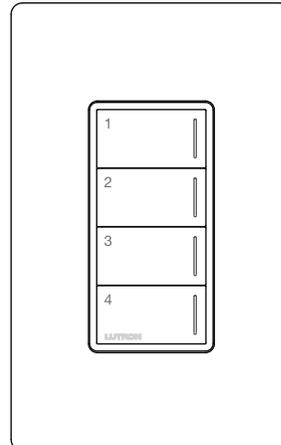

RRST-W4B

#### Personalized (Replacement Button Kits)

Printing to be specified in myProjects. Visit [engraving.lutron.com/sunnata](http://engraving.lutron.com/sunnata) for printing options. Predefined custom printing must be defined at time of order.

Note: Button Kit orders cannot be manufactured until printing information is received.

## RadioRA 3 Sunnata Keypads

### Colors and Finishes

#### Gloss Finishes



White  
WH



Ivory  
IV




Light Almond  
LA



Black  
BL

#### Satin Finishes



Brilliant White  
BW



Glacier White  
GL



Snow  
SW



Architectural White  
RW



Lunar Gray  
LG



Mist  
MI



Pebble  
PB




Cobblestone  
CS



Slate  
SL



Midnight  
MN



Biscuit  
BI



Sand  
SD




Taupe  
TP



Pumice  
PM



Clay  
CY



Sage  
SA




Espresso  
EP



Truffle  
TF



Deep Sea  
DE



Signal Red  
SR

- Due to printing limitations, colors and finishes shown cannot be guaranteed to perfectly match actual product colors.
- Color chip keychains are available for more precise color matching:

Gloss Finishes- DG-CK-1

Satin Finishes - SF-CK-1

For coordinating wallplates and accessories, visit [lutron.com/claro](http://lutron.com/claro)