



# Power Jumper IC™

## SONOS® Speaker Mount and In-Wall Power Solution

PN: C7HS-XX

Utilizing the Power Jumper IC™ in-wall interconnect and the Speedport™ SC the SONOS® Speaker Mount and In-Wall Power Solution is the perfect tool when installing wall mounted wireless speakers.

The Power Jumper IC™ in-wall interconnects provide easy power relocation that does not require an electrician. By simply inserting the two ends together and fastening with a strain relief bracket, power is secured within the wall and hidden from view.


The mounting solution is compatible with any 1/4-20 mounted speaker and will tighten both into the speaker and into the Speedport™ when fastened. Additional low voltage cables such as Cat5 can also be passed through the Speedport™.

For new construction projects, add on our metal **Speedport™**

**New Construction Bracket.** Simply fasten to a stud and once the drywall has been laid, the bracket allows installers to use a rotozip opening to ensure proper size and placement of the hole.



PN: SB-1

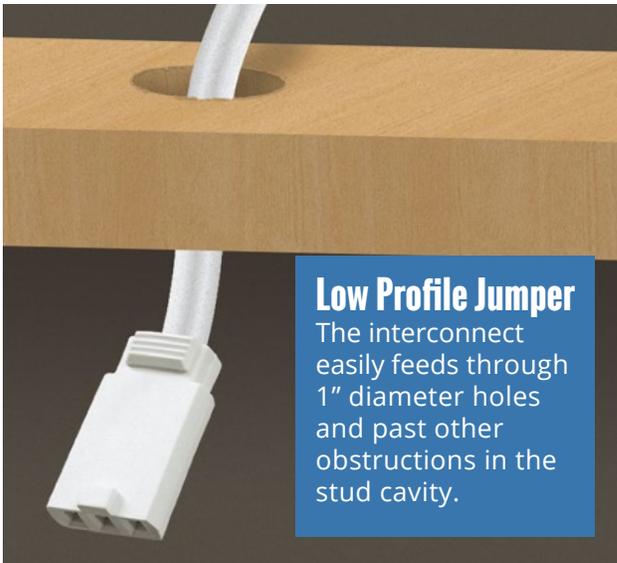

**Low Profile Jumper**  
The interconnect easily feeds through 1" diameter holes and past other obstructions in the stud cavity.



Conforms to STD 514D and Certified CSA STD 22.2 No. 42.1-00  
Electrical Rating: 125 VAC, 15 AMPS, 60 Hz  
Meets UL 817 & CSA#22.2#21  
Interconnect meets UL 2256, 2459  
Meets NEC 2014 Article 400.7 (A)(11)  
Patented with multiple patents pending.  
All rights reserved. Sonos is a registered trademark of Sonos, Inc.



**Jumpers Also Available in 15', 25' and 40' lengths**

www.midlite.com

115 Wordell St. Fall River, MA 02721

Tel: 508.676.5169 / Toll Free: 800.606.5169 / Fax: 508.861.0105






# Power Jumper IC™ SONOS® Speaker Mount and In-Wall Power Solution PN: C7HS-XX

Installed View

Utilizing the Power Jumper IC™ in-wall interconnect and the Speedport™ SC the SONOS® Speaker Mount and In-Wall Power Solution is the perfect tool when installing wall mounted wireless speakers.

The Power Jumper IC™ in-wall interconnects provide easy power relocation that does not require an electrician. By simply inserting the two ends together and fastening with a strain relief bracket, power is secured within the wall and hidden from view.

The mounting solution is compatible with any 1/4-20 mounted speaker and will tighten both into the speaker and into the Speedport™ when fastened. Additional low voltage cables such as CAT5 can also be passed through the Speedport™.

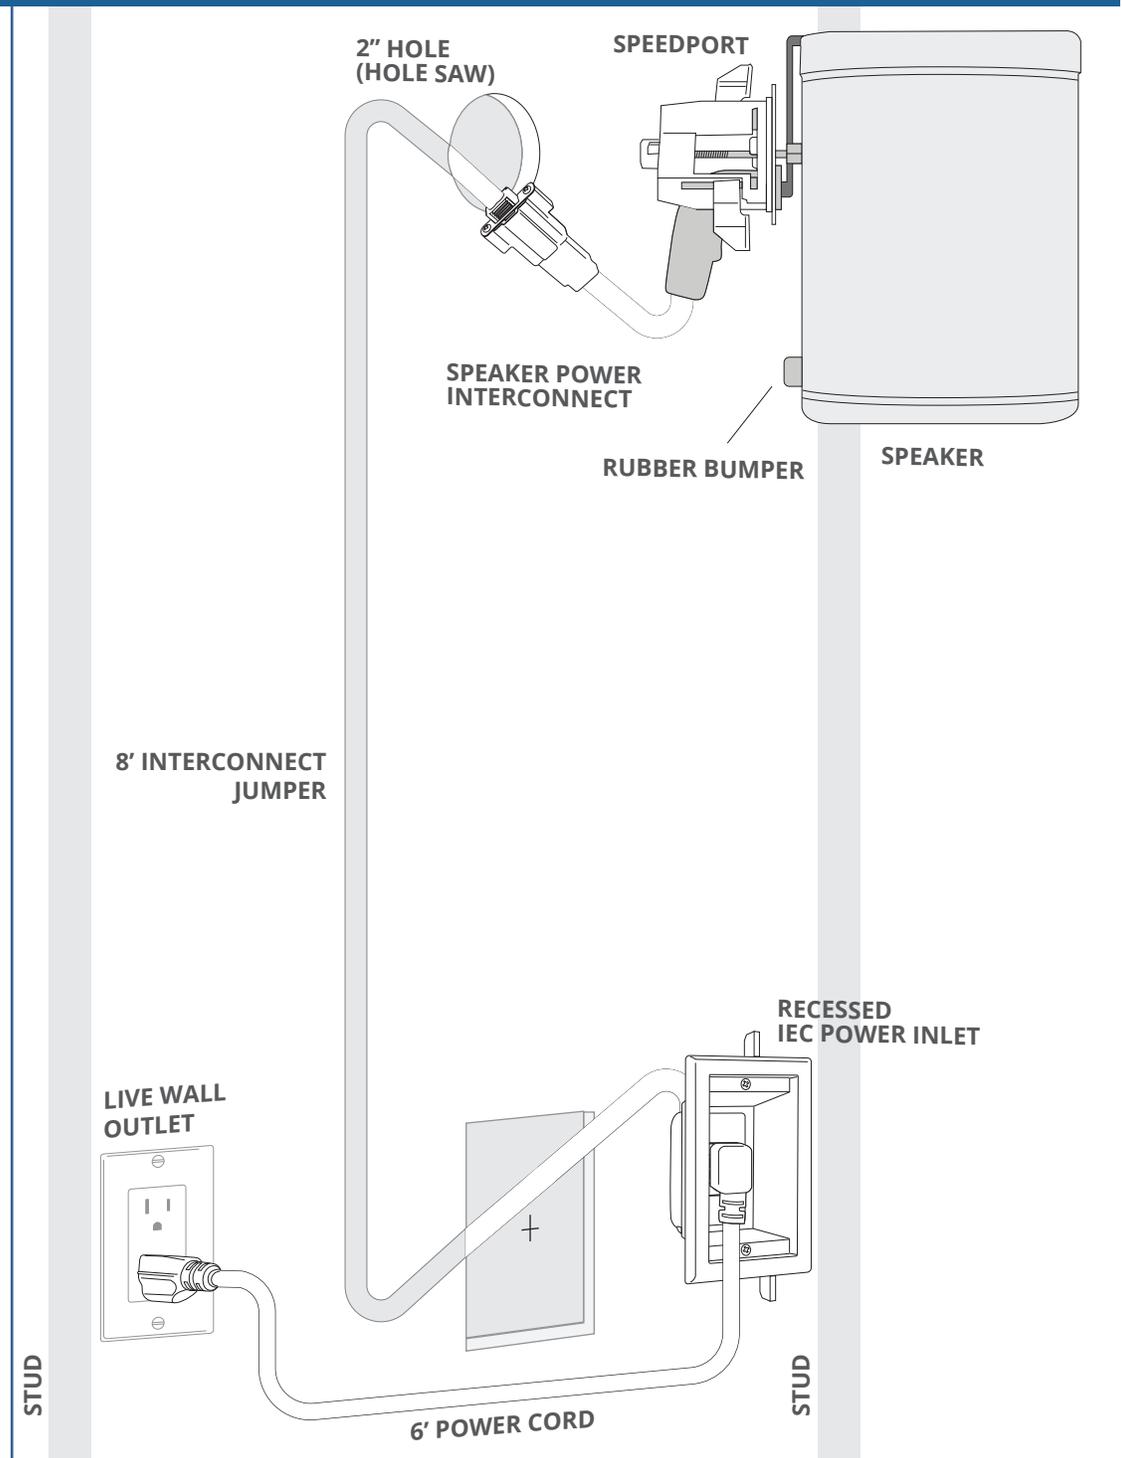

Conforms to STD 514D and Certified CSA STD 22.2 No. 42.1-00  
Electrical Rating: 125 VAC, 15 AMPS, 60 Hz  
Meets UL 817 & CSA#22.2#21  
Interconnect meets UL 2256, 2459  
Meets NEC 2014 Article 400.7 (A)(11)  
Patented with multiple patents pending.  
All rights reserved. Sonos is a registered trademark of Sonos, Inc.



www.midlite.com

115 Wordell St. Fall River, MA 02721

Tel: 508.676.5169 / Toll Free: 800.606.5169 / Fax: 508.861.0105

