



Blank Fiber Adapter Plate

This Blank Fiber Adapter Panel was designed for our FB23- patch panels and enclosures. They are perfect for providing a clean look while allowing for future growth when connecting outside plant, riser, or distribution cables.


Features

- Cold Rolled Steel
- Durable Powder Coated Black
- LGX Adapter Plate Foot Print

Physical Characteristics


- Plate: Cold Rolled Steel, 1.6mm Thick
- Panel Foot Print: LGX
- Dimensions: 130mm x 30mm
- Finish: Black Powder Coated Paint

Fiber Adapter Plate

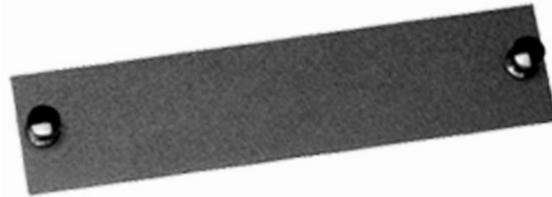

Item Number:

Item# FB24-3426BLK

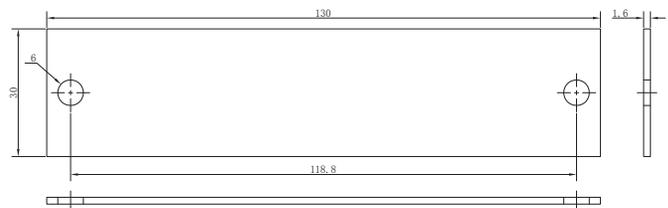

Optional FB23- Fiber Patch Panels & Enclosures

- Fiber FDU Patch Panel with Splice Trays, High Density, Slide-Out, 1U, Fits 3 LGX Adapter Panels

This rack mount fiber optic patch panel is a 1U/1RU high density distribution unit that provides fiber capacity of up to 72 fibers. Included with this Fiber Patch Panel are three 24 fiber splice trays. This panel also includes a smooth sliding drawer type pull out system.



FB36-1495R3

- Fiber Patch and Splice Panel, Slide-Out, 1U, 3 Adapter Panel Capacity

This rack mount fiber patch panel is a 1RU, 19" and 23" rack mount fiber distribution unit designed to support up to 36 fibers. The fiber housing has a slide out master panel with an integrated tray stop to prevent over extension of fiber cables. The drawer slides are nylon which makes the drawer slide in and out easier. The fiber enclosure also has a two-piece top and a swell latch door to allow for easy access to the adapter panels.



FB23-5845RT3

- Blank Wall Mount Fiber Patch Panel, Compact Indoor with 1 Splice Holder, Up to 6 Ports

This compact indoor wall mount fiber enclosure is for inter-connectivity and termination of optical fibers with the capacity of one adapter panel and comes with an integrated single splice holder that can accommodate 12 single fusion splices. Its small size is ideal for use in tight closets, inside cabinets and enclosures, and DOT Traffic Control enclosures. Black.



FB36-4296WM

- Wall Mount Fiber Patch Panel, NEMA 3R Rated, Up to 24 Ports, Non-Captive Entry

This plastic wall mount fiber patch panel provides the ultimate mounting flexibility with use of the FlexGrid™ mounting system. FlexGrid™ equipped boxes are guaranteed to fit any manufacturers splitter footprint. Four raised mounting blocks allow for a second level mounting plate to be installed above the base level of the fiber housing. Specialized grommets and a main cable tie-down location provide added security along with industry standard locking terminal. This wall enclosure can hold two adapter panels and two 12 fiber splice trays (one splice tray is included).



FB23-5778-N324

PrimusCable.com - (951) 824-1571



Blank Fiber Adapter Plate

Optional Fiber Tools

Fiber Stripper, 2.0mm-3.0mm, 900, 250/125um

- Five Stripping Functions in One Tool
- Factory Set and Calibrated
- Cushioned, Locking Handles
- Strips Jackets from 2-2.4mm, 2.8-3mm fiber & 2-3mm Loose Tube Buffer Tubes
- Removes 900µm Buffer from Loose Buffer Without Removing the Acrylate Coating.
- Strips Buffer & Acrylate from 900/125µm & 250/125µm Fiber



A

Fiber Cleaver, Ceramic Blade, Lengths 2mm-20mm

- Fast Splicing for Emergency Restorations
- Self Gripping Clamshell Design
- Adhesive Option for Added Pull Strength
- For 125um Clad Fiber
- Singlemode and Multimode
- Affordable



B

Fiber Optic Cable Termination Tool Kit

- | | | |
|---------------------------|-----------------------|-------------------|
| • Fabric Tape Measure | • Fiber Stripper | • Fiber Stripper |
| • 3 Economy Tie Labels | • Connector Cleaner | • Kevlar Scissors |
| • 5 Fusion Splice Sleeves | • Jacket Stripper | • Fiber Stripper |
| • PVC Electrical Tape | • Kim Wipes | • Utility Knife |
| • 6 Side Cutting Pliers | • 50 Foam Swabs | • Ruler |
| • 1Mtr 3mm Furcation | • 4 Bit Screwdriver | • 1/2 Nut Driver |
| • 1Mtr 900µm Furcation | • Rugged Carry Case | • 5 D-Gel Wipes |
| • 3oz. Alcohol Bottle | • Fiber Disposal Unit | • Piano Wire |
| • Safety Glasses | | |
| • Tweezers | | |
| • Buffer Tube Stripper | | |
| • Round Cable Slitter | | |
| • Needle Nose Pliers | | |
| • Black Marker | | |
| • Black Work Mat | | |



C

A: TL5-4569 / B: TL9-4431 / C: FB26-3921-FTK

Optional Fiber Patch Cables

SC-SC Multimode, Duplex, 62.5/125, OM1

- 1 Meter: FB1-2214-SC/SC-1M
- 2 Meters: FB1-2215-SC/SC-2M
- 3 Meters: FB1-2216-SC/SC-3M
- 5 Meters: FB1-2217-SC/SC-5M
- 7 Meters: FB1-2218-SC/SC-7M
- 10 Meters: FB1-2219-SC/SC-10M
- 15 Meters: FB1-2220-SC/SC-15M



ST-ST Multimode, Duplex, 62.5/125, OM1

- 1 Meter: FB3-2585-ST/ST-1M
- 2 Meters: FB3-2586-ST/ST-2M
- 3 Meters: FB3-2587-ST/ST-3M
- 5 Meters: FB3-2588-ST/ST-5M
- 7 Meters: FB3-2589-ST/ST-7M
- 10 Meters: FB3-2590-ST/ST-10M
- 15 Meters: FB3-2591-ST/ST-15M



LC-LC Multimode, Duplex, 62.5/125, OM1

- 1 Meter: FB4-2464-LC/LC-1M
- 2 Meters: FB4-2465-LC/LC-2M
- 3 Meters: FB4-2466-LC/LC-3M
- 5 Meters: FB4-2467-LC/LC-5M
- 7 Meters: FB4-2468-LC/LC-7M
- 10 Meters: FB4-2469-LC/LC-10M
- 15 Meters: FB4-2258-LC/LC-15M



©2017 CRN Solutions Inc. dba. Primus Cable
All Rights Reserved.

Although Primus Cable makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Primus Cable provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Primus Cable be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Primus Cable has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

All sales of Primus Cable products are subject to Primus Cable's standard terms and conditions of sale.

Primus Cable believes this product to be in compliance with EU RoHS (Directive 2002/EC, 27 Jan. 2003). Material manufactured prior to the compliance date may be in stock at Primus Cable facilities and in our Distributor's inventory. The information provided in this Product Disclosure, and the identification of materials listed as reportable or restricted within the Product Disclosure, is correct to the best of Primus Cable's knowledge, information, and belief at the date any other operation of the product itself or the one that it becomes a part of. This Product Disclosure is not to be considered a warranty or quality specification and regulations based on their individual usage of the product.

Primus Cable declares this product to be in compliance with EU LVD (Low Voltage Directive 73/23/EEC), as amended by directive 93/68/EEC

PrimusCable.com - (951) 824-1571