

Industrial Wide-Gap Magnetic Contacts

SM-4601-LQ

3" (76mm) Gap, Closed Loop, Armored Leads, UL Listed

SM-4601-L3Q

3" (76mm) Gap, Open/Closed Loop, Armored Leads

Features:


- Useful for industrial situations where a wide-gap, surface mount contact is needed
- Rugged aluminum housing
- Weatherproof and sealed for outdoor use
- 36" (91cm) Wire leads enclosed in armored cable
- Contact switch has iridium-plating for a high melting point and Vickers hardness for higher power handling and a longer expected life
- 3" (76mm) Gap
- Mounting bracket included
- Lifetime limited warranty



Specifications:

Model number	SM-4601-LQ	SM-4601-L3Q
Loop type	Closed loop	Open/Closed loop
Electrical configuration	N.O. (SPST)	NO/NC (Form C)
Operation gap	3" (76mm)	
Connectors	36" (91cm) Armored leads	
Material	Case	Aluminum
	Contacts	Iridium-plated
Contact rating	0.1A@100VDC (max.)	
	1.0A@10VDC (max.)	
	10W (max.)	
Temperature	-15°~160° F (-25°~70° C)	
Switch cycles	50 Million (0.1mA@5VDC)	
Switch dimensions	3"x1"x1/2" (76x25x13 mm)	
Magnet dimensions	3"x1"x1/2" (76x25x13 mm)	
Magnet	Rare-earth neodymium	

Dimensions:

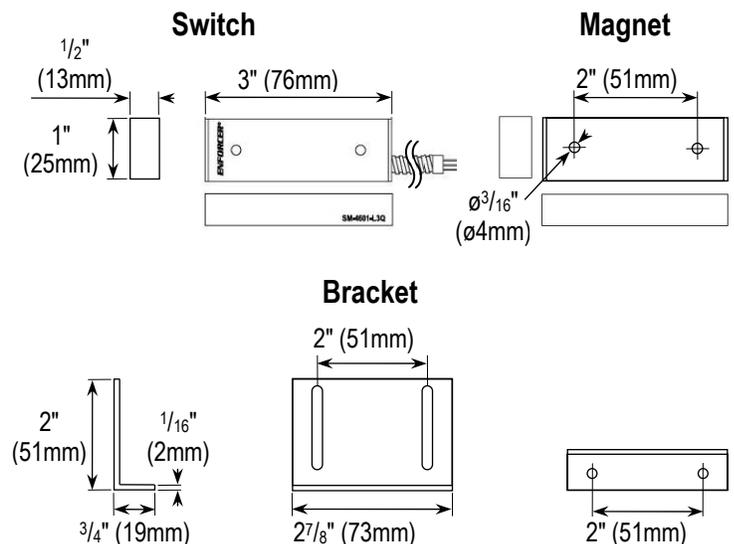

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com