

CX-93M-12LS SHEAR LOCK



FEATURES

- COMPATIBLE WITH ALL ACCESS AND EGRESS SYSTEMS
- RUGGED AND COMPACT DESIGN
- STAINLESS STEEL CONSTRUCTION
- SELECTABLE 12/24 VDC
- SELECTABLE 3 TO 12 SECOND TIMER
- BOND SENSOR OUTPUT (FORM C)




CX-93M-12LS

DESCRIPTION

Camden CX-93M-12LS shear lock is designed for swinging doors, where the lock can be mortised into the door and frame. The CX-93M-12LS has a remarkably low current draw, while providing 1,200 lbs. of holding force. The shear lock features stainless steel construction and is backed by a lifetime warranty.

APPLICATION

CX-93M-12LS shear locks are ideal for exterior and interior swing doors where the use of a traditional electric strike or magnetic lock would be unattractive, impractical or prohibitively difficult. The shear lock and armature assemblies are recessed (mortised) into the door and the door frame, providing an unobtrusive high security locking solution.

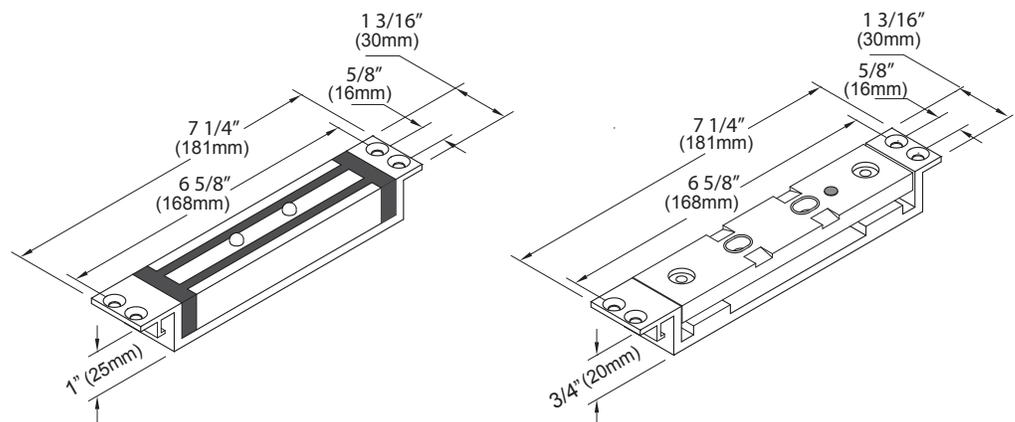

CX-93M-12LS SHEAR LOCK

SPECIFICATIONS

| | |
|------------------------------|--|
| SHEAR HOLDING FORCE: | UP TO 1,200LBS. (545KG) |
| VOLTAGE INPUT: | 12 VDC / 24 VDC |
| CURRENT DRAW: | 310mA @12V DC 180mA @24V DC |
| LOCK AND ARMATURE GAP: | 5/64" (2MM)) |
| OPERATING TEMP: | -4°F TO 122°F (-20°C TO +50°C) |
| DOOR MONITOR CONTACT RATING: | 0.5A@28V DC |
| LOCK DIMENSIONS: | 7 1/4" L x 1 3/16" W x 1" D (181mm x 30mm x 25mm) |
| ARMATURE DIMENSIONS: | 7 1/4" L x 1 3/16" W x 3/4" D (181mm x 30mm x 20mm) |

ORDERING INFORMATION

| MODEL | DESCRIPTION |
|--------------|--|
| CX-93M-12LS: | 1,200 LBS. SHEAR LOCK, MORTISE MOUNT, WITH BOND SENSOR |