


## MAGNETIC LOCKS

- Compatible with all access/egress systems
- Aluminum/Stainless steel casings are weather and vandal resistant
- On board MOV's provide protection against voltage spikes and surges
- Assorted mounting brackets and filler plates available

Most models are available with a Lock Sensor (Bond Sensor) to indicate that the door is secure. The built-in timer eliminates the need for add-on exit delay timers.

### Product Numbering Guide

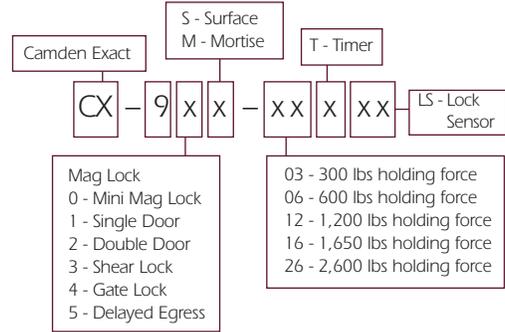

1200 lbs single & double models now available with door position switch.

	Model	Description	Current Draw	Dimensions
<b>1200 lbs Surface Mount Single Door</b>  	CX-91S-12	Basic		
			500 mA @ 12 V 250 mA @ 24 V	10 1/2" x 2 7/8" x 1 9/16"
<b>1200 lbs Surface Mount Double Doors</b>  	CX-92S-12	Basic		
			2 x 500 mA @ 12 V 2 x 250 mA @ 24 V	21" x 2 7/8" x 1 7/8"
<b>600 lbs Surface Mount Single Door</b>  	CX-91S-06	Basic		
			500 mA @ 12 V 250 mA @ 24 V	9 7/8" x 1 7/8" x 1"
<b>600 lbs Surface Mount Double Doors</b>  	CX-92S-06	Basic		
			2 x 500 mA @ 12V 2 x 250 mA @ 24V	19 5/8" x 1 7/8" x 1 1/16"
<b>600 lbs Mortise Mount Single Door</b>  	CX-91M -06	Basic		
			480 mA @ 12V 240 mA @ 24V	9" x 1 1/2" x 1 1/8"
<b>300 lbs Surface Mount Single Door</b>  	CX-90S-03	Basic		
			360 mA @ 12 V 180 mA @ 24 V	6 1/2" x 1 3/8" x 13/16"
<b>300 lbs Mortise Mount Single Door</b>  	CX-90M-03	Basic		
			360 mA @ 12 V 180 mA @ 24 V	8" x 1 3/8" x 13/16"
<b>600 lbs Surface Mount Gate Lock</b>  	CX-94S-06LS	c/w Lock Sensor/Relay		
			500 mA @ 12V 250 mA @ 24V	8" x 1 3/4" x 1 1/4"
<b>1200 lbs Surface Mount Gate Lock</b>  	CX-94S-12LS	c/w Lock Sensor/Relay		
			500 mA @ 12V 250 mA @ 24V	10 5/8" x 1 3/8" x 1 1/4"
<b>2600 lbs Shear Lock</b> <ul style="list-style-type: none"> <li>Self aligning</li> <li>Ultra low current draw</li> <li>Compact mortise mount</li> </ul>  	CX-93M-26LS	c/w Lock Sensor/Relay		
			480 mA @ 12 V 240 mA @ 24 V	9 1/16" x 1 1/4" x 1 1/16"



### Delayed Egress Magnetic Lock

- Applications include pedestrian traffic control, wandering patient, and theft control. Ideal for use in hospitals, nursing homes, retail stores, warehouses, airports, museums, etc.
- Pushing on door initiates alarm; door remains locked for 15 seconds. Lock releases immediately with input from fire/life safety system.
- NFPA 101, CSFM, ANSI/BHMA compliant; with 15 second exit delay, and 0-3 second adjustable nuisance delay. Chicago/BOCA Building Code models also available.
- Built-in key switch provides 15-45 second timed bypass, sustained bypass, and alarm reset.
- Door position switch monitors if door is open.
- Clear anodized aluminum finish standard. Other finishes available.
- May also be activated by pressure sensitive, request-to-exit bar (see P. 18 for details).

### DELAYED EGRESS

		Model	Description	Current Draw	Dimensions
		CX-95S-16DS	c/w door status switch	820mA@12VDC	11" x 2 <sup>3</sup> / <sub>4</sub> " x 2 <sup>5</sup> / <sub>8</sub> "
		CX-95S-16LS	c/w door status switch/ bond sensor/relay + LED	500mA@24VDC	

### MAGNETIC LOCK ACCESSORIES

		Model	Description	Dimensions
	Armature Housing	CX-0001	For 1200 lbs Magnet	7 <sup>15</sup> / <sub>16</sub> " x 3" x 5 <sup>5</sup> / <sub>8</sub> "
		CX-0011	For 600 lbs Magnet	7 <sup>15</sup> / <sub>16</sub> " x 2 <sup>3</sup> / <sub>16</sub> " x 5 <sup>5</sup> / <sub>8</sub> "
	Adjustable L Bracket	CX-1001	For 1200 lbs Magnet	10 <sup>1</sup> / <sub>2</sub> " x 3" x 1 <sup>1</sup> / <sub>2</sub> "
		CX-1011	For 600 lbs Magnet	9 <sup>13</sup> / <sub>16</sub> " x 1 <sup>15</sup> / <sub>16</sub> " x 1 <sup>1</sup> / <sub>8</sub> "
	Set of L & Z Brackets	CX-1002	For 1200 lbs Magnet	10 <sup>1</sup> / <sub>2</sub> " x 3" x 1 <sup>13</sup> / <sub>16</sub> " 6 <sup>5</sup> / <sub>16</sub> " x 2 <sup>1</sup> / <sub>2</sub> " x 2 <sup>1</sup> / <sub>2</sub> "
		CX-1012	For 600 lbs Magnet	9 <sup>13</sup> / <sub>16</sub> " x 1 <sup>13</sup> / <sub>16</sub> " x 1 <sup>1</sup> / <sub>8</sub> " 6 <sup>3</sup> / <sub>16</sub> " x 2" x 2"
	Angle Bracket	CX-1003	For 1200 & 600 lbs Mags	10 <sup>1</sup> / <sub>2</sub> " x 1 <sup>1</sup> / <sub>2</sub> " x 1"
	Spacer Bar	CX-1004	For 1200 & 600 lbs Mags	10 <sup>1</sup> / <sub>2</sub> " x 1 <sup>11</sup> / <sub>16</sub> " x 5 <sup>5</sup> / <sub>8</sub> "
	Stainless Steel surface mounting kit	CX-1008	For 2600 lbs shear lock	9 <sup>1</sup> / <sub>4</sub> " x 1 <sup>5</sup> / <sub>8</sub> " x 1 <sup>1</sup> / <sub>2</sub> "
	Glass door mounting kit	CX-1013	For 1200 and 600 lbs Mags, use on 1/2" or 3/4" thick doors	7 <sup>1</sup> / <sub>4</sub> " x 2 <sup>7</sup> / <sub>16</sub> " x 1 <sup>1</sup> / <sub>4</sub> "