

WP2

NEMA Rated Outdoor Power Supply/Battery Enclosure

Description

Altronix WP2 is a UL Listed, NEMA 4/IP 66 Rated power supply/battery outdoor enclosure. It can accommodate a wide variety of Altronix power supplies, sub-assemblies, and accessories.



WP2

Specifications

Features

- Hot compression molded, halogen free, self extinguishing fiberglass reinforced polyester.
- Stainless steel continuous hinge and stainless steel padlockable latches.
- Integral flanges simplify wall or pole mounting.

Capacity

- Fits two (2) 12VDC/7AH or up to four (4) 12VDC/4AH batteries.

Agency Listings

- UL Listed Enclosure.
- CE European Conformity.

Physical and Environmental

Dimensions (H x W x D)

17.53" x 15.3" x 6.67" (445.3mm x 388.6mm x 169.4mm).

Product Weight 9 lb. (4.08 kg).

Shipping Weight 10.5 lbs. (11.57 kg).

Accessories

PMK2 Pole Mount Kit (order separately)

PMK2 pole mount kit is designed to simplify installation of outdoor units. It accommodates 2" - 8" (diameter) poles.

Kit includes:

- Two (2) powder coated steel mount brackets.
- Four (4) stainless steel bolts.
- Four (4) stainless steel lock washers.
- Two (2) wormgear quick release straps.




PMK2

WP2
NEMA Rated
Outdoor Power Supply/Battery Enclosure



Product Position Chart for the Following Models:

Altronix Products	Mounting
ACM8, ACM8CB, ACMS8, ACMS8CB, AL300ULXB, AL400ULXB2, AL600ULXB, AL1012ULXB, AL1024ULXB2, eFlow3NB, eFlow4NB, eFlow6NB, eFlow102NB, eFlow104NB, LINQ8ACM, LINQ8ACMCB, OLS75, OLS120, OLS120D2, OLS180, OLS250	Ⓐ
ACM8, ACM8CB, ACMS8, ACMS8CB, AL300ULXB, AL400ULXB2, AL600ULXB, AL1012ULXB, AL1024ULXB2, eFlow3NB, eFlow4NB, eFlow6NB, eFlow102NB, eFlow104NB, LINQ8ACM, LINQ8ACMCB, OLS75, OLS120, OLS120D2, OLS180, OLS250	Ⓑ

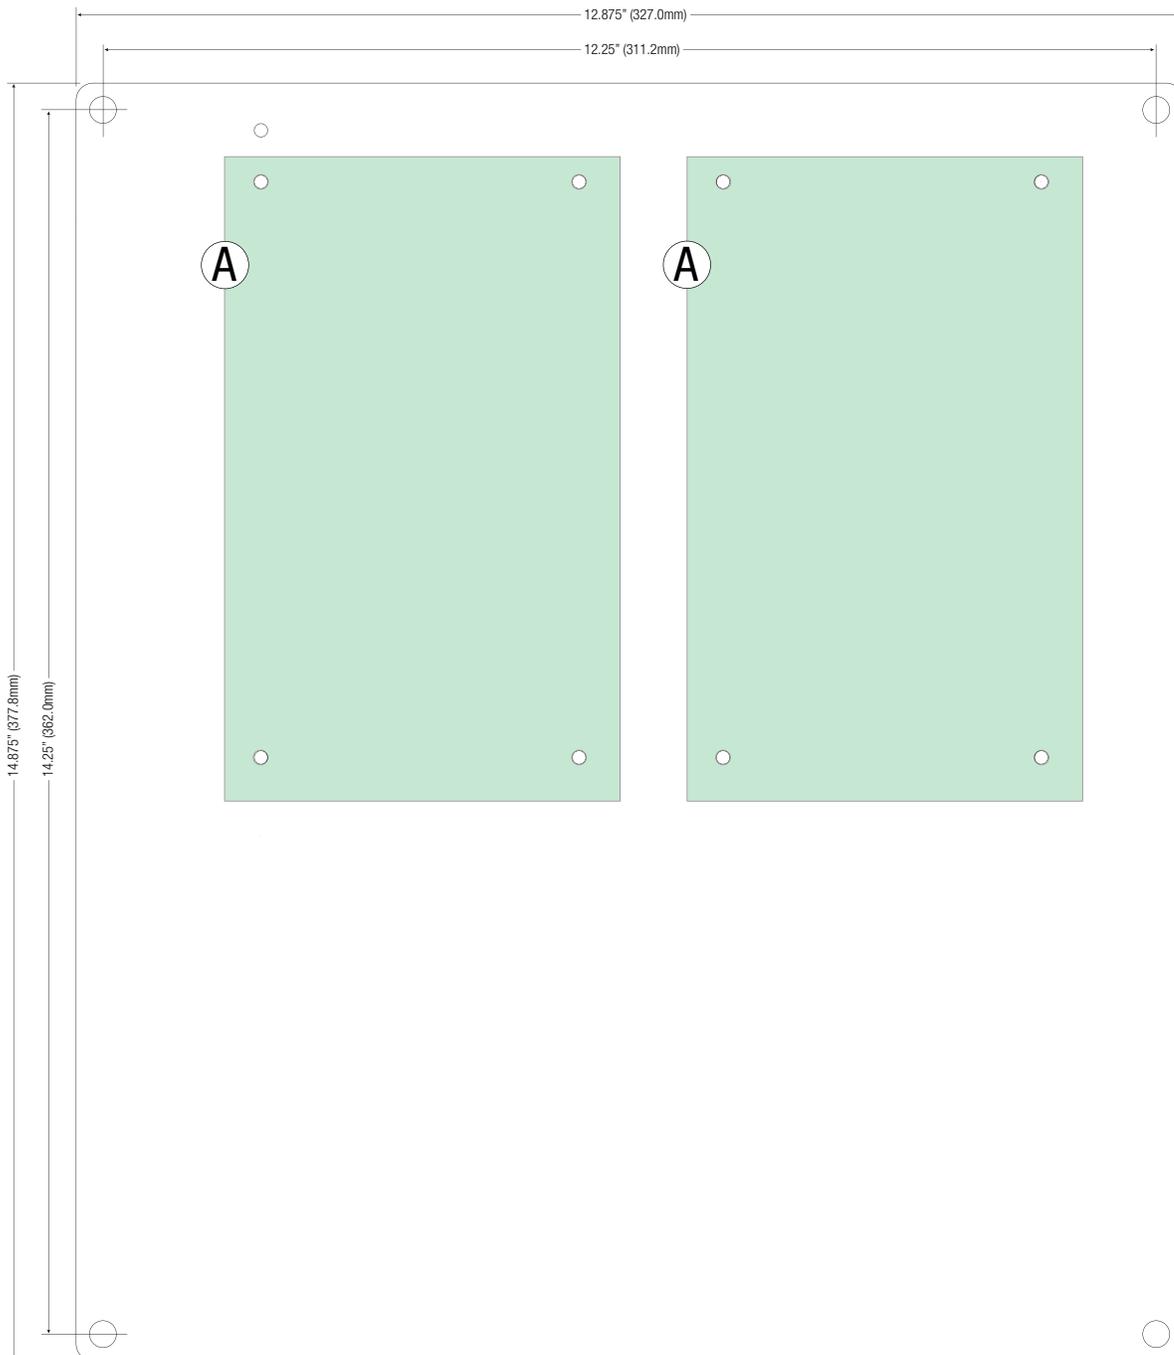

WP2 NEMA Rated Outdoor Power Supply/Battery Enclosure



Dimensions and Drawing

Dimensions (H x W x D approximate)
17.53" x 15.3" x 6.67" (445.3mm x 388.6mm x 169.4mm)

