



2U Fiber Rack Mount Patch Panel Fits 6 Adapter Panels & up to 144F

This Fiber Distribution Panel is 2U and fits in a standard 19" rack or enclosure. It has 6 adapter panel ports that can fit up to 144 fibers with 6x Quad LC fiber adapter panels. This fiber panel is designed to support both patching and splicing in one distribution panel and includes trays & spools.

The distribution panel has a slide out master panel with an integrated tray stop to prevent overextension of fiber cables. The distribution panel also has a two piece top and a latch door to allow for easy access to the adapter panel.

Features

- Slide-Out Panel Makes Accessing Fiber Easy
- Includes Spice Trays and Spools
- Fits 6 LGX Adaptor Panels
- Fits up to 144 Fibers
- Steel Construction

Physical Characteristics

- Panel Material: Cold-Roll Steel
- Rack Unit Size: 2U (2RU)
- Rack Mounting: 19" Racks
- Dimensions: 3.5"(H) x 19"(W) x 10.75"(D)
- Finish: Black Powder Coat Paint

Optional Patch Cords

Fiber Optical Patch Cords LC, SC, or ST

Our fiber optic patch cords are terminated with state-of-the-art connectors, which are available in LC, SC, or ST connector types with various combinations along with PC/APC and APC polish types to meet your job needs.



Optional Fiber Adapter Panels

LGX Style Fiber Optical Adapter Panels



- Available in Single-Mode & MultiMode
- Available in Simplex or Duplex.
- Available in ST, SC & LC
- Made with steel & powder coated black.



Fiber Patch Panels



Item Number:
Item# FB36-1627R6

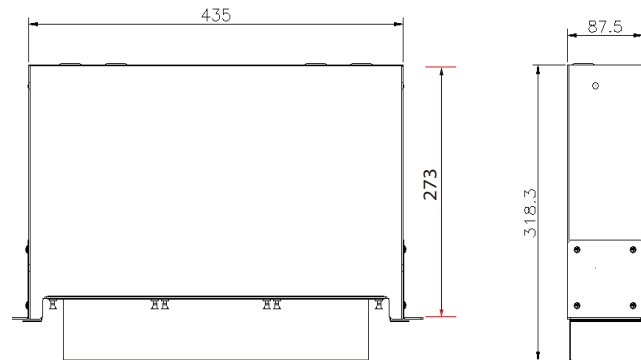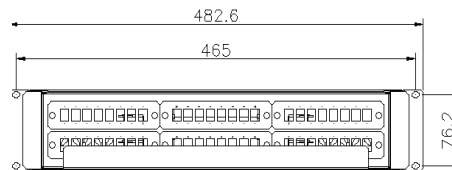

©2018 CRN Solutions Inc. dba. Primus Cable
All Rights Reserved.

Although Primus Cable makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Primus Cable provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Primus Cable be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Primus Cable has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

All sales of Primus Cable products are subject to Primus Cable's standard terms and conditions of sale.

Primus Cable believes this product to be in compliance with EU RoHS (Directive 2002/EC, 27 Jan. 2003). Material manufactured prior to the compliance date may be in stock at Primus Cable facilities and in our Distributor's inventory. The information provided in this Product Disclosure, and the identification of materials listed as reportable or restricted within the Product Disclosure, is correct to the best of Primus Cable's knowledge, information, and belief at the date any other operation of the product itself or the one that it becomes a part of. This Product Disclosure is not to be considered a warranty or quality specification and regulations based on their individual usage of the product.

Primus Cable declares this product to be in compliance with EU LVD (Low Voltage Directive 73/23/EEC), as amended by directive 93/68/EEC

PrimusCable.com - (951) 824-1571