

CB135 Conduit Base




CB135	
Appearance	Hikvision white
Application	Wire intake box
Material	Aluminum alloy
Dimension	Ø5.39" x 1.65" (Ø137 mm x 42 mm)
Weight	9.88 ozs (280 g)

NOTES: Pay attention to color matching and special installation instructions on back of this sheet for select cameras.

- Aluminum Alloy Material with Surface Spray Treatment
- Waterproof Design

Available model
CB135

Dimensions

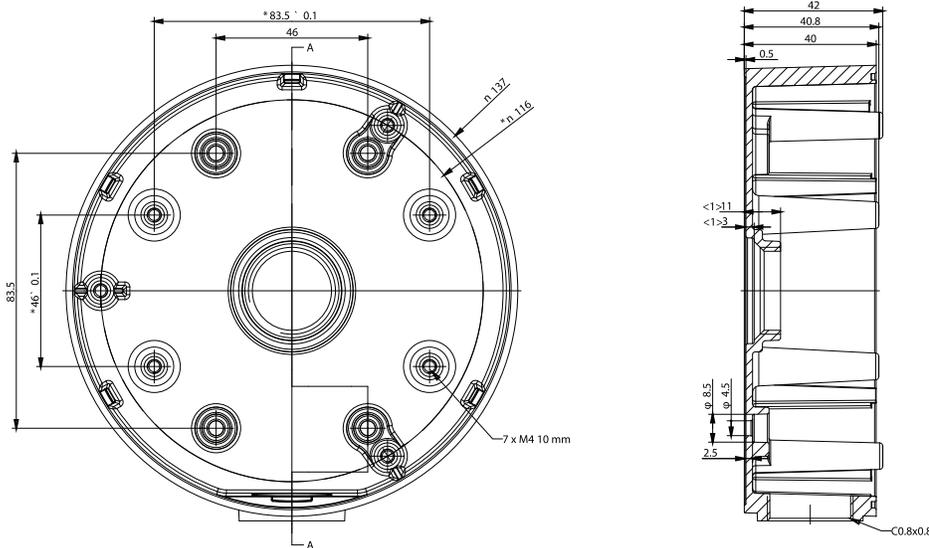

NOTE: The actual bracket may vary from the picture above.

Special Installation Instructions for Select Cameras Only

Some cameras require the following instructions when installing the CB135 (e.g., DS-2CD23x5G1, DS-2CD23x7G1, DS-2TD1217-2/3/6/V1, and others).

1. Twist to remove trim ring from camera mounting base.
2. Loosen locking screw on camera mounting base.
3. Detach camera mounting base from camera.
4. Position camera mounting base on CB135 conduit base.
5. Align four screw holes on the camera mounting base to the four inner screw hole posts on the CB135.
6. Attach camera mounting base to the CB135 with four screws.



NOTE: Do not use the three outer screw holes on the CB135 rim; you must use the four inner screw hole posts.

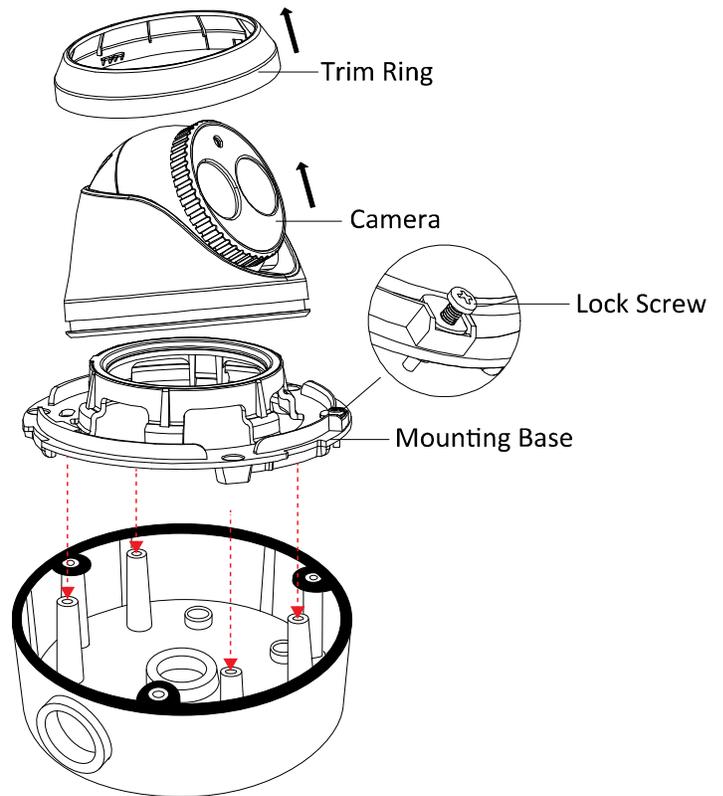


Figure 1, Attaching CB135 to a Select Camera Model (Typical)