

TAA
COMPLIANT PRODUCT
NDAA
COMPLIANT PRODUCT

STAR-LIGHT PLUS™
Color in Darkness Technology

H.265
H.264/MJPEG **30fps**

-40°F
Cold Start™



5MP



5 YEAR
Warranty

Summary

This NDAA/TAA-compliant MEGAPIX Ai™ IP camera provides 5MP resolution license plate detection with an Ai engine at the edge. The MEGAPIX Ai cameras place the power of Ai deep learning at your fingertips, with object identification and tracking. The camera detects and extracts a license plate's characters in milliseconds at up to 75mph with a high 95% accuracy, converting the pixels to usable digital data that can be searched and mined for analytics, patterns and access reports. The weather-resistant bullet camera is IP67-rated, IK-10 impact-resistant, and will Cold Start at -40°F/-40°C. All MEGAPIX cameras are ONVIF conformant, assuring their successful integration with any open platform solution on the market.

Features

- 5MP 1/2.8" image sensor at real-time 30fps
- Star-Light Plus™ color in near-total darkness technology
- Ai Deep Learning object detection
- Create up to 40 detection zones in the same camera
- Easy setup with no calibration
- Seamless integration and control with DW Spectrum® IPVMS
- Reduce false alarms
- Increase your recording storage with logic rules and smart recording
- ANPR optical character recognition captures and reads vehicle license plates at up to 75mph speeds
- 6-50mm vari-focal p-iris lens with motorized zoom and auto-focus
- True Wide Dynamic Range (WDR)
- Triple codecs (H.265, H.264, MJPEG) with simultaneous streaming
- Cold Start -40°F (-40°C)
- 130' Smart IR™ with intelligent camera sync
- Smart DNR™ 3D digital noise reduction
- True day/night with mechanical IR cut filter
- Programmable privacy zones
- Auto gain control (AGC)
- Auto white balance (AWB)
- Two-way audio
- Micro SD/SDHC/SDXC class 10 card slot (card not included)
- Alarm sensor input and relay output
- PoE+ Class4 and DC12V
- ONVIF conformant, profile S
- UL listed
- NDAA/TAA compliant
- IP67 dust-tight and waterproof to 3 feet
- IK 10-rated impact-resistant
- 5 year warranty




Accessories (optional)

- DWC-BLJUNC-W Junction box
- DW-POEinjector PoE injector
- DWC-PMB-WLW Pole mount bracket

Dimensions

Unit: Inch (mm)

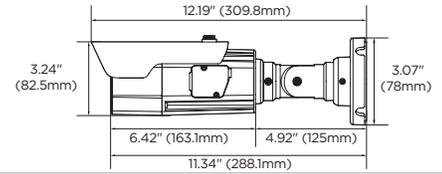

Specifications



IMAGE	
Image sensor	1/2.8" 5.69MP CMOS sensor
Total pixels	2704(H) X 2104(V)
Active pixels	2592(H) X 1944(V)
Minimum scene illumination	0.1 lux (color), 0 lux (B/W)
S/N ratio	50dB
Test monitor video output	Local video output CVBS 1.0V p-p (75Ω), 4:3 aspect ratio
LENS	
Focal length	6-50mm, F1.6
Lens type	Vari-focal p-iris lens with motorized zoom and auto-focus
Field of view (HFOV)	HFOV: 6.9°-40.8° / VFOV: 5.2°-30.2°
IR distance	130ft range
Optical zoom	8x optical zoom
I/O	
Audio input/output, compression	1 (1.0Vrms, 3K ohm) input/1 output, G.711
Alarm input/output	1 input/1 output
Event trigger	Motion, network loss, temperature anomaly, illegal login, schedule, sensor detection
INTELLIGENT VIDEO ANALYTICS	
Deep learning analytics	Deep Learning object tracking and optical character recognition capturing and reading vehicle license plates
Analytics filters	Zones and lines, tamper, metadata, intrusion, line crossing, counting, counting lines, appear, disappear, stopped, enter, exit, direction, tailgating, dwell, logical rules
Recognition distance day/night	23 - 165ft (7 - 50m) / 23 - 131ft (7 - 40m)
Vehicle speed range	25 - 75mph
OPERATIONAL	
Shutter mode	Auto, manual, anti-flicker, slow shutter
Shutter speed	1/15 - 1/32000
Slow shutter	1/2, 1/3, 1/5, 1/6, 1/7.5, 1/10
Auto gain control	Auto
Day and night	TDN, Auto, day (color), night (B/W)
Digital Noise Reduction (DNR)	Smart DNR™ 3D DNR
Wide Dynamic Range (WDR)	True WDR, 120dB
White balance	Yes
Privacy zones	16 programmable privacy masks
Alarm notifications	Notifications via email, FTP, alarm output and SD card recording
Memory slot	Micro SD/SDHC/SDXC class 10 card (not included)
NETWORK	
LAN	10/100Base-T
Video compression type	H.265, H.264, MJPEG
Resolution	H.265: 2592x1944, 2560x1440, 1920x1080, 1280x720, 800x600, 704x576, 704x480, 640x480, 640x360, 352x288, 352x240
	H.264: 2592x1944, 2560x1440, 1920x1080, 1280x720, 800x600, 704x576, 704x480, 640x480, 640x360, 352x288, 352x240
	MJPEG: 1920x1080, 1280x720, 800x600, 768x432, 704x576, 704x480, 640x480, 640x360, 352x288, 352x240
Frame rate	Up to 30fps at all resolutions
Video bitrate	100Kbps - 25Mbps, multi-rate for preview and recording
Bitrate control	Multi-streaming CBR/VBR at H.265 (controllable frame rate and bandwidth)
Streaming capability	dual-stream at different rates and resolutions
IP	IPv4
Protocol	TCP/IP, UDP, AutoIP, RTP (UDP/TCP), RTSP, NTP, HTTP, HTTPS, SSL, DNS, DDNS, DHCP, FTP, SMTP, ICMP, SNMPv1/v2/v3 (MIB-2), ONVIF
Security	HTTPS (TLS), IP filtering, 802.1x, digest authentication
SIP/VoIP support	SIP VoIP
ONVIF conformance	Yes
Web viewer	OS: Windows®, Mac® OS, Linux® Browser: Internet Explorer®, Google Chrome®, Mozilla Firefox®, Safari®
Video management software	DW Spectrum™ IPVMS
ENVIRONMENTAL	
Operating temperature	-40°F - 122°F (-40°C - 50°C)
Operating humidity	10-90% RH, (non-condensing)
IP and IK rating	IP67-rated, IK10 impact-resistant
Other certifications	CE, FCC, UL, NDAA, TAA
ELECTRICAL	
Power requirement	DC12V, PoE IEEE 802.3at PoE+ Class4 (Adapter not included)
Power consumption	DC12V: 13.2W, 11A, PoE: 14.4W, 0.3A
MECHANICAL	
Material	Aluminum die-casting bullet housing
Dimensions	12.2" x 3.87" (310 x 97mm)
Weight	2.64 lbs (1.2 kg)
Warranty	5 year warranty



Built for Users.™

