

2-port Gigabit Waterproof PoE Splitter

DW-POEEX2



WHAT'S IN THE BOX					
PoE Extender		1	Wrench (27mm)		1
Waterproof Cap and Rubber Ring		1	Mounting Screws (M4x30mm)		4
User Installation Guide		3	Ground cable		1

NOTE: Download all your support materials and tools in one place



1. Go to: <http://www.digital-watchdog.com/resources>
2. Search your product by entering the part number in the 'Search by Product' search bar. Results for applicable part numbers will populate automatically based on the part number you enter.
3. Click 'Search'. All supported materials, including manuals and quick start guide (QSGs) will appear in the results.



Hardware Description


LED	Color	Function
LAN	Green	Off: No device is connected to the corresponding port Light: Indicates the link through that port is successfully established at 10/100 /1000 Mbps. Blink: transmitting data and power

NOTE: The maximum distance supported with the extender is 656ft (200m). 328ft (100m) between the PoE switch and the extender, and 328ft (100m) between the extender and the IP camera.

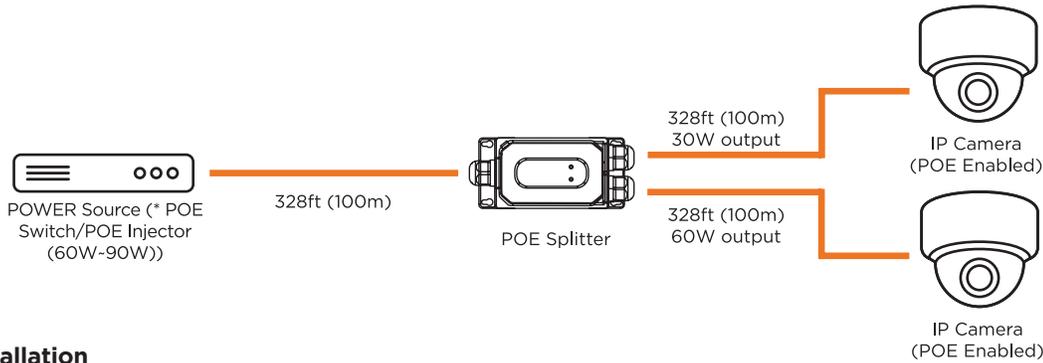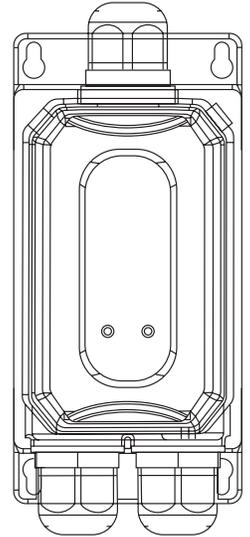

Installation

1. Use the extender itself to mark and drill the necessary holes on the mounting surface.
2. Use the four (4) screws and anchors to secure the extender to the mounting surface. The recommended screw cap diameter is 5.5-6.5mm).
3. Align the four fixing holes of the machine as shown below and hang the machine smoothly on the screws.

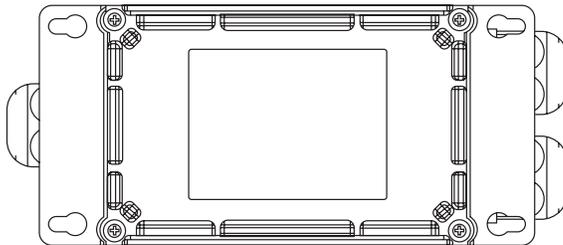

4. Follow the steps in the diagram below to pass the network cables through the waterproof cap before connecting it to the extender (e).
5. Use the wrench included with the extender to secure the base of the waterproof cap to the extender first (g), then tighten the top of the cap to secure it around the network cable.

