

Surface-Mount Dual-Tone
Wall Siren or Speaker

SH-525SQ / SH-905SQ

Manual



- Indoor surface mount
- Compact design
- White ABS plastic housing
- Quick and easy installation


Parts List

- 1x Wall siren or speaker 4x Mounting screws
4x Wall anchors 1x Manual
1x Case screw

Specifications

Models	SH-525SQ	SH-905SQ
Operating voltage	6~14 VDC	N/A
Decibels	100dB	N/A
Current draw	550mA@12VDC	N/A
Power	N/A	15W
Impedance	N/A	6~8 Ω
Dimensions	4 ⁵ / ₁₆ "x4 ⁵ / ₁₆ "x2 ³ / ₁₆ " (110x110x56 mm)	

Overview

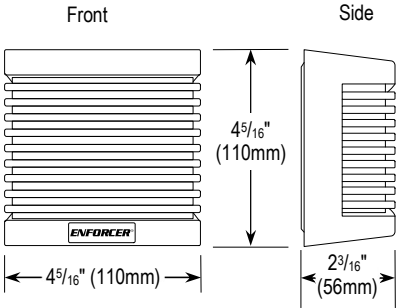


Installation

Please read the manual carefully before you begin the installation.

1. Run the respective wires to a backbox and connect the wiring as in the Wiring Diagram.
2. Using the included screws, install in the backbox, taking care not to crimp the wires.

Wiring Diagram – Siren*

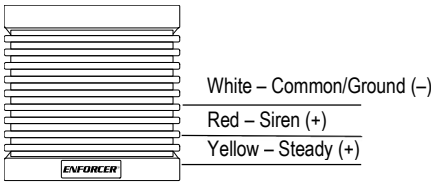

*Wiring for Speaker (SH-905SQ) is Red (+) and Black (-)

California Proposition 65 Warning: These products may contain chemicals which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

WARRANTY: This SECO-LARM product is warranted against defects in material and workmanship while used in normal service for one (1) year from the date of sale to the original customer.

NOTICE: The SECO-LARM policy is one of continual development and improvement. For that reason, SECO-LARM reserves the right to change specifications without notice. SECO-LARM is also not responsible for misprints. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. Copyright © 2024 SECO-LARM U.S.A., Inc. All rights reserved.

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606
Phone: (949) 261-2999 | (800) 662-0800

Website: www.seco-larm.com
Email: sales@seco-larm.com

