



Pole mount bracket for

DWC-PMB-WLW



WHAT'S IN THE BOX

Camera Mounting Screws		4	Steel Band		2
DWC-WLJUNCW Mounting Screws		3			


NOTE: Download all your support materials and tools in one place.

1. Go to: <http://www.digital-watchdog.com/resources>
2. Search your product by entering the part number in the **'Search by Product'** search bar. Results for applicable part numbers will populate automatically based on the part number you enter.
3. Click **'Search'**. All supported materials, including manuals and quick start guide (QSGs) will appear in the results.




INSTALLATION


- 1 Position the pole-mount in the desired location on the pole. The pole's max width should be no more than 470mm (the max length of the steel band).
- 2 Attach the mount firmly to the pole using a steel bands included.
- 3 Starting from the point where the pole-mount bracket will be attached, measure the circumference of the pole. Some poles will taper with their height, so if the pole is tapered, be sure to adapt the band lengths to fit.
- 4 Feed the included steel bands through the slots in the pole bracket.
- 5 Tighten the clamp on the steel band using a Phillips screwdriver. When the clamp is tightened, check that the end of the band is held in place against the pole.
- 6 Bend the band and the clamp to a 90° angle to secure the free end of the remaining length of metal band.
- 7 Use the table below to pair your wall mount or junction box with the appropriate set of mounting holes.

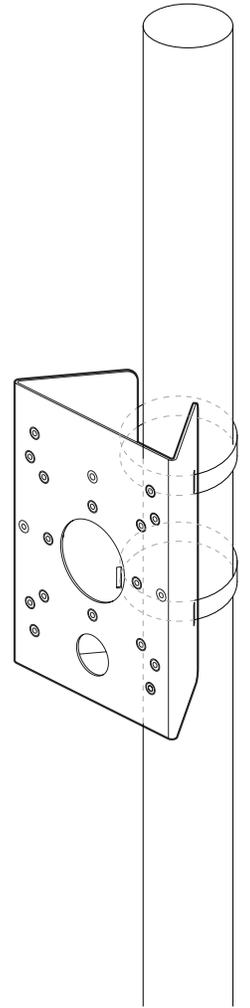


MOUNTING HOLES #1
DWC-P230WMW wall mount bracket for PTZ IP cameras




MOUNTING HOLES #2
DWC-BLJUNC-W and DWC-PBJUNC junction boxes for bullet cameras




MOUNTING HOLES #3
DWC-WMJUNCW junction box for wall mount brackets




MOUNTING HOLES #4
All other dome camera wall mount brackets



MOUNTING HOLES #5
DWC-BLJUNC-W and DWC-PBJUNC junction boxes for bullet cameras



Pole mount front view

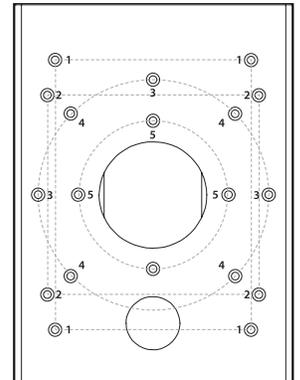

Mounting point	Compatible wall mount	Mounting size
Mounting holes labeled 1	DWC-P230WMW	4.01" x 5.59" (102x142mm)
Mounting holes labeled 2	DWC-PZWM	4.13" x 4.33" (105x110mm)
Mounting holes labeled 3	DWC-WMJUNCW	Ø 4.76" (Ø 121mm)
Mounting holes labeled 4	All other dome camera wall mount brackets	Ø 4.76" (Ø 121mm)
Mounting holes labeled 5	DWC-BLJUNC(-W), DWC-PBJUNC, DWC-B7JUNC	Ø 3.07" (Ø 78mm)