




More is More

IQPanel 5 v5.0.1

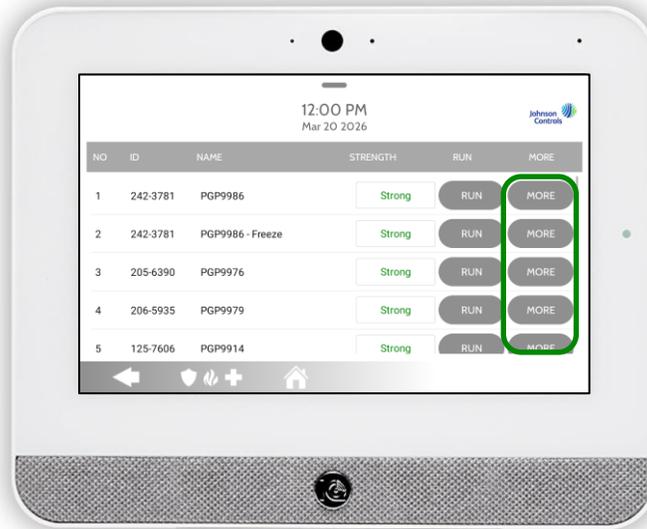

The IQ5 v5.0.1 and higher panels support all PowerG and PowerG+ devices. Plus, the panel will provide additional information and testing opportunities with just a tap.

Programming:

Settings > Advanced Settings > System Tests > PowerG Test ~ MORE

PGP9976 (3) RUN

Sensor Id: 205-6390

Temperature: 66° Fahrenheit ←

Current Strength: **Strong** ←

24 Hrs Strength: **Strong** ←

Last Updated: 12:00 PM, Mar 20, 2026

Sensor Long ID: 05D6F8F6

Firmware Version: e3.0

Sensor Radio Version: 1.29

Sensor Radio ID: 70.42.42

Repeater: Main Floor Repeater (13) ←

Battery Voltage: 3.100

Battery Level: 100% ←

Sensor LockDown: Disabled


Dirtiness: 0.00% ←

TEST LED TEST SIREN

PowerG+ devices

- Temperature of the device
- Signal Strength – current/24hr average
- Repeater being utilized for signal path
- Battery Level
- Dirtiness Level for the PGP9976

More is More

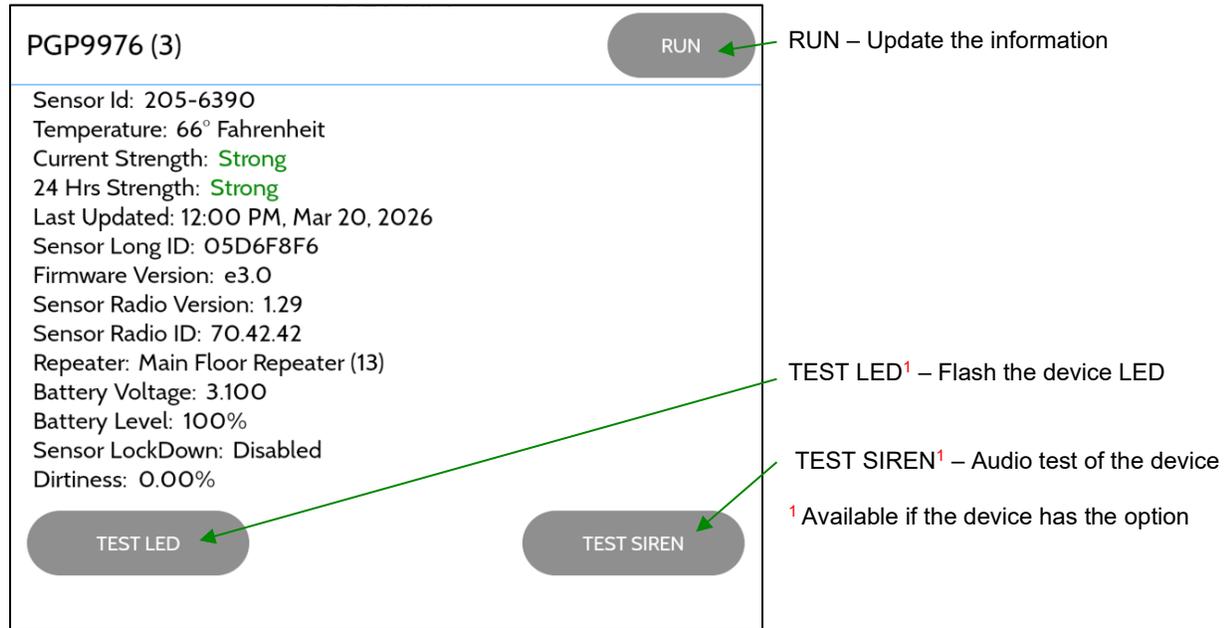

- **Tech Tip:** Tap **MORE** for the details on each PowerG device as needed.
- **Tech Tip:** Use the ‘TEST LED’ to visually confirm the correct device and do not waste valuable time chasing a zone labeling error.
- **Tech Tip:** Use the ‘TEST SIREN’ or ‘TEST BUZZER’ to find the device in the field.
- **Tech Tip:** To display the device temperature, Enable ‘Temperature Reporting’ in Settings > Advanced Settings > Installation > Installer / Dealer Settings
- **Tech Tip:** The Dealer Code, Installer Code and Master Codes all have access to the System Tests > PowerG Test menu.

